


Rotary Filter SFneos Serie

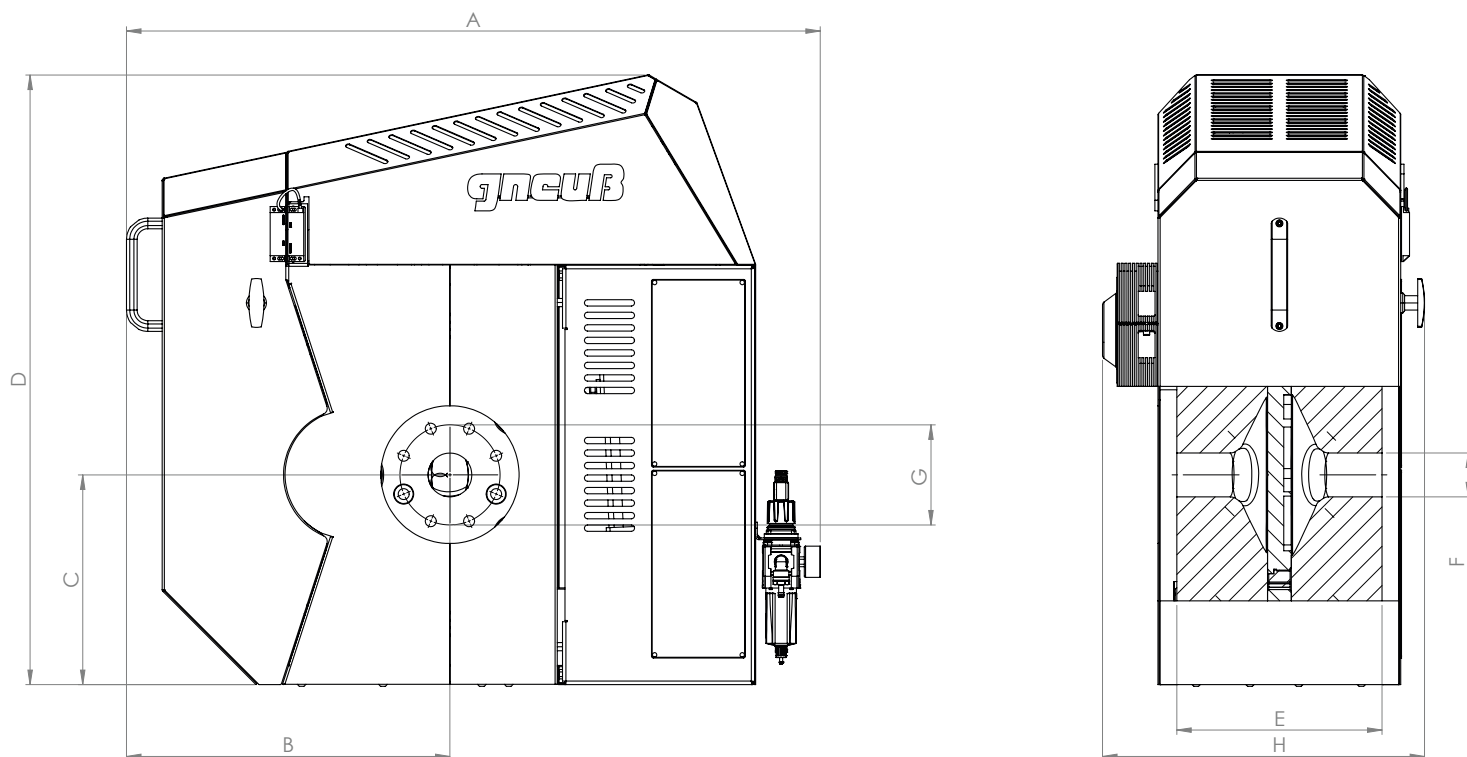

Technical Data SFneos

filter type	screen area	heating capacity		heater zones	pres- sure	max. temp.	Q in	dimensions in mm								weight in kg
	in cm ²	in watt		⁽¹⁾	in bar ⁽²⁾	in °C ⁽³⁾	kg/h									
	active	electric	liquid	electric				A	B	C	D	E	F	G	H	
SFneos 30	40	4.000	5.000	2	350	320	200	908	377	225	642	196	15	110	383	
SFneos 45	70	5.600	7.000	2	350	320	350	908	377	225	642	196	20	110	383	
SFneos 60	120	5.600	7.000	2	350	320	500	887	337	245	725	196	25	110	431	
SFneos 75	135	5.900	8.000	2	350	320	650	997	490	260	759	232	25	130	461	
SFneos 90	260	14.000	18.000	2	300	320	1.200	1.109	517	335	974	328	25	160	515	
SFneos 110	300	14.000	18.000	2	250	320	1.410	1.109	517	335	974	328	25	160	515	
SFneos 150	450	10.680	20.000	2	300	320	2.100	1.158	547	370	1.053	372	35	160	539	
SFneos 175	610	20.200	26.000	3	250	320	2.900	1.317	663	468	1.288	419	40	220	617	
SFneos 200	850	28.500	37.000	3	200	320	4.000	1.713	772	555	1.402	566	45	250	853	
SFneos 250	1.280	33.300	43.000	3	200	320	6.000	1.773	837	585	1.502	622	50	250	909	
SFneos 330	1.800	-	54.000	-	200	320	8.500	2.278	992	785	1.902	744	50	300	1.042	
SFneos 400	2.370	-	65.000	-	180	320	11.100	2.563	1.177	855	2.102	812	50	350	1.150	

1 – 1 heater zone for liquid heating | 2 – high pressure versions available as an option | 3 – up to 400 °C possible as an option.
Also available in ATEX design.